

## AUTOMATIC TWIN BLOWER HAND DRYER

### AS 25-IR Series



**AS 25-IR SM**  
(S.S. # 304 mirror finish)



**AS 25-IR SB**  
(S.S. # 304 brush finish)



**AS 25-IR (W)**  
(Steel with white enamel coating)



**18 months on Sensor, PCB, Heating Coil & 36 months on motor**



**Consumes Only 1400 W**



**All metal construction**



**Heavy Duty Design for All Types of Facilities**



**Made-in-India**



**High Quality Eliminates Breakdowns & Maintenance Costs**



**Industry Best Safety Features**




**90% Cost Reduction Compared to Paper Towels**

### Specifications:

- ✓ Fully automatic twin blower hand dryer with IR Sensor
- ✓ Deep drawn single piece outer cover, 1.2 mm thick
- ✓ Power : 1400 W ✓ Power Supply: 230 VAC, 50Hz, Single Phase
- ✓ Heating Coil : Two spiral wound Kanthal heating elements.
- ✓ Impellers : Two aluminum impellers, dynamically balanced
- ✓ Motors : Two brushless AC motors, 2850 RPM
- ✓ Maximum air temperature at outlet : 70 °C
- ✓ Noise Level : 75db @ 1 meter
- ✓ Get LEED credits for Green Building certification

**2X** Unlike cheap imported hand dryers, our model has 2 motors, impellers & heating coils making it truly 'a Twin Blower Hand Dryer'

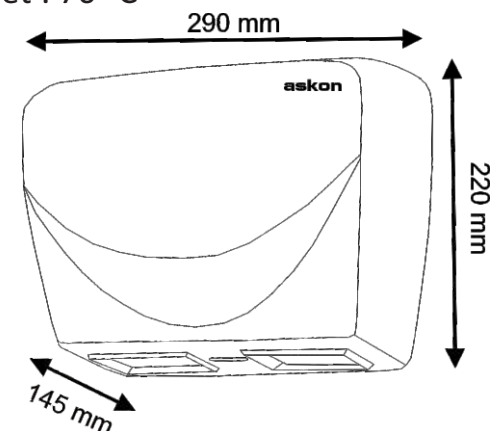

### Safety & Anti-Vandalism Features:

- ✓ 75 seconds auto cut-off timer with 30 second safety shutdown\* feature to prevent misuse and vandalism.
- ✓ Motor equipped with thermal cut-off for overheating protection.
- ✓ Heating coil equipped with thermal cut-off and thermal fuse for over heating protection.

\*After 75 seconds of continuous use, the hand dryer will enter into safety shut down mode for 30 seconds. During these 30 seconds, the hand dryer will not start even if an object is present in front of the sensor. After 30 seconds, the sensor will check if the object has been removed. If not, the hand dryer will not start till it is removed.