

SmartSense Sensor Faucet



Made with premium quality materials



Sensor & PCB sealed with resin to prevent moisture damage



Sensor range adjusts automatically to the surroundings




50% Reduction in water consumption compared to manual faucets




Touch free operation prevent spread of germs

**ASF-03E /
ASF-03B**

DIMENSION DIAGRAM:

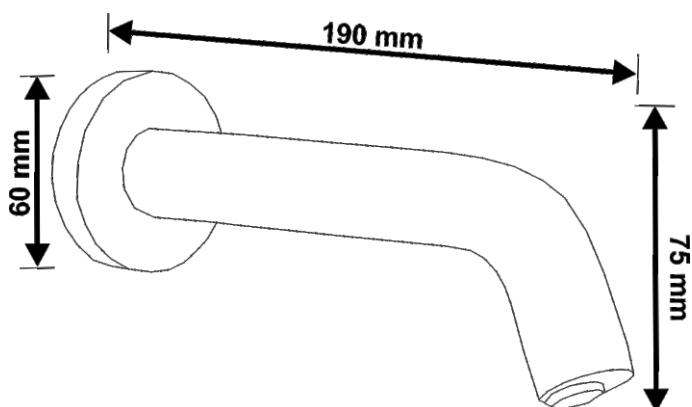

CONNECTION DIAGRAM:

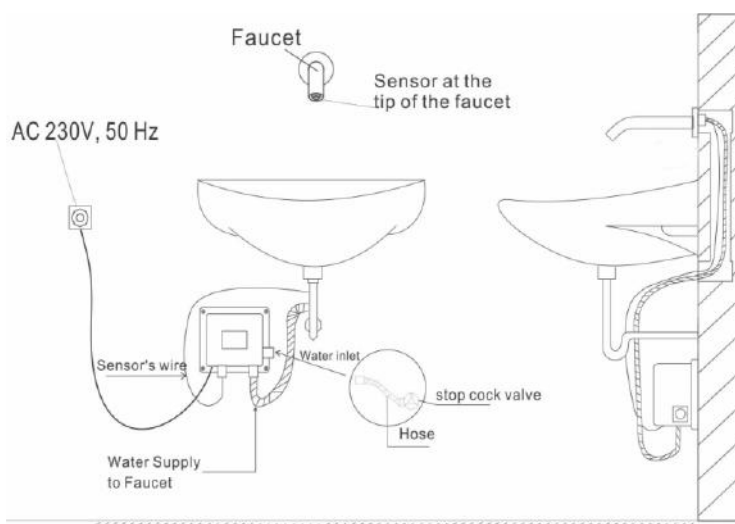

SPECIFICATIONS

- ✓ Wall mount type suitable for counter sunk and counter top basins
- ✓ Chrome plated brass faucet with IR sensors at the tip of the faucet
- ✓ Brass solenoid magnetic latching valve with piston valve technology
- ✓ 230 Volts, A/C single phase for ASF-03E
- ✓ Use of four "AA" size ALKALINE 1.5 V batteries (DC6V) for ASF-03B
- ✓ Sensor & PCB are sealed to prevent damage due to moisture
- ✓ Sensing range adjusts automatically to surroundings
- ✓ 1/2" B.S.P. input and output water supply connection
- ✓ Min. recommended water pressure: 15 psi
Max. recommended water pressure: 80 psi
Shut-off water pressure: 7 psi
- ✓ 6 inches gap recommended between the sensor and the nearest object for proper functioning.
- ✓ Sensor equipped with battery low LED indicator