

# askon

## Specification & Installation Instructions Counter mounted soap dispenser Model : AS-CM

### Contents of the box (Refer Fig. 1 & 2):

- 1) Soap bottle with bottle nut
- 2) Dispensing Unit
- 3) Soap tube

### Installation:


- 1) Soap dispenser is designed for installation in 28.5 mm (1<sup>1</sup>/<sub>8</sub>" ) hole on the counter.
- 2) Remove the retaining nut and the black rubber washer from the dispensing unit. Do not remove the white rubber washer. Slide the transparent soap tube tightly on the end of the ABS cylindrical tube located inside the threaded housing (refer fig. 2). The ABS cylindrical tube is visible from the bottom of the threaded housing.
- 3) Insert the dispensing unit along with the white rubber washer and soap tube into the mounting hole. Put the black rubber washer on the threaded housing from the bottom and tighten the dispensing unit onto the counter with the retaining nut (refer fig. 3).
- 4) Fill the soap bottle with liquid hand wash. Fit the soap bottle along with the bottle nut to the threaded housing as shown in the fig. 3.

### Operation:

Press the stainless steel cap to dispense liquid soap. For filling the liquid soap, hold the bottle nut and rotate the soap bottle in clockwise direction to remove it.

### Specifications:

Counter mounted liquid soap dispenser dispenses commercially available liquid hand wash. Spout can rotate 360° without damage to valve mechanism. Stainless steel piston is locked inside the black ABS cylindrical tube with concealed stainless steel 'P' pin. Valve is equipped with stainless steel spring, U-packing seal and duckbills. Threaded housing can accommodate mounting thickness of upto 55 mm (refer Fig. 3). Translucent plastic bottle has 600 ml capacity of liquid hand wash.

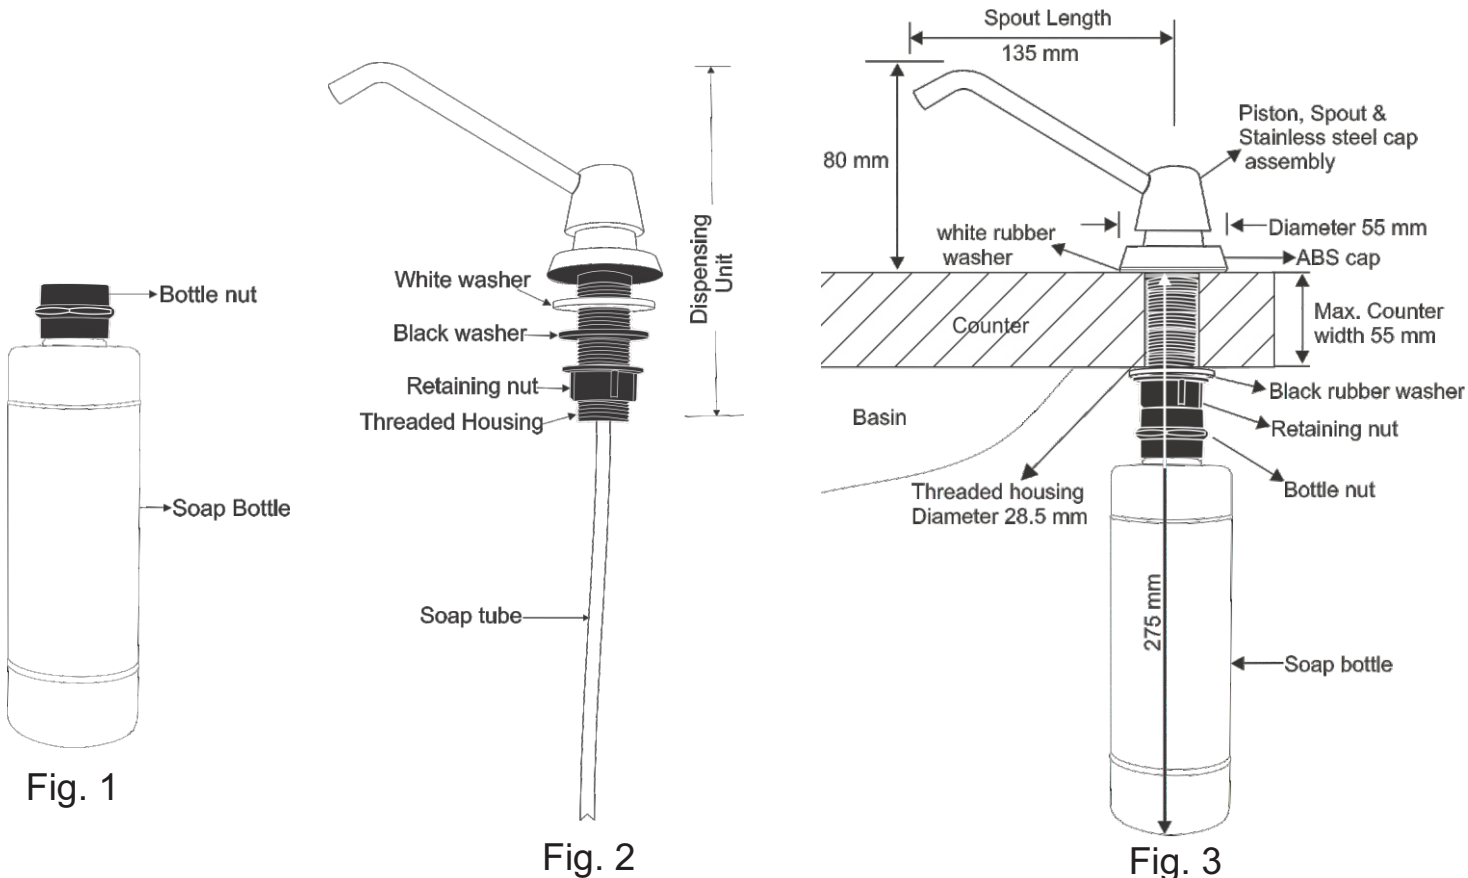

Mfg. by: askon hygiene products pvt. ltd., Mumbai

E-mail: [info@askonhygiene.com](mailto:info@askonhygiene.com)